


RevNo	Revision note	Date	Signature	Checked
00	Sketch Only			

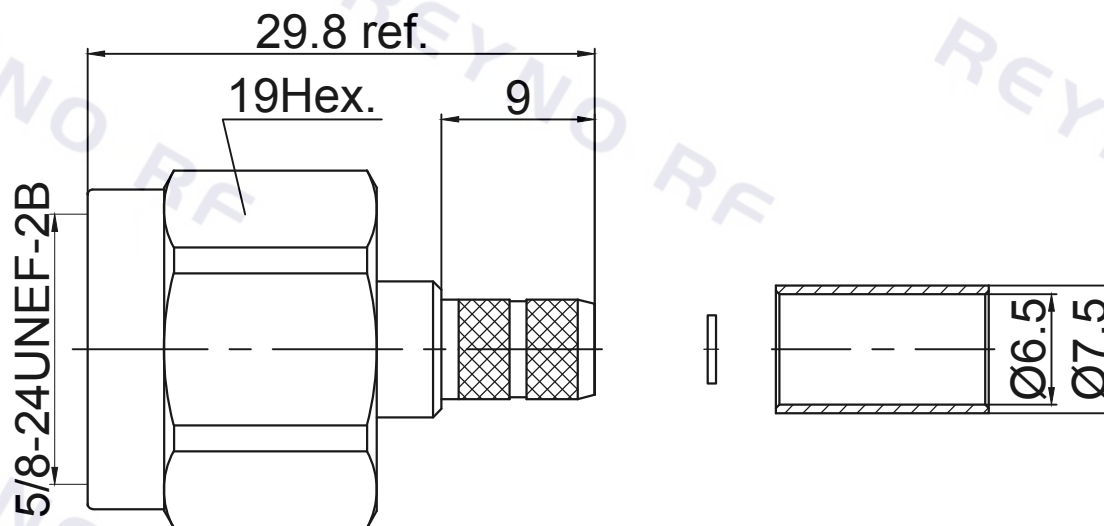

Material & Finishing:

1. Center conductor: Brass, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Ternary Alloy Plating
4. Other Metal Parts: Crimp Ferrule: Brass, Nickel Plating
Nut: Brass, Nickel Plating
5. Gasket: Silicone Rubber

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: ≤ 1.15 (0~3GHz)

RoHS Compliant.

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64 MAX.		
ALL TOLERANCES ARE:		
DECIMALS	FRACTIONS	ANGLES
$x \pm 1.0$	$\pm 1/64$	$x' \pm 1'$
$x.x \pm 0.5$		$x'x' \pm 0.5$
	$x.xx \pm 0.1$	



THESE DRAWING & SPEC. ARE THE PROPERTY OF LEILUO RF AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

Unit:mm

Title
N MALE CRIMP FOR LMR240 CABLE
Captivated Center Conductor

Drawn by Ckd by Appd by Date

Scale 5:1 Sheet 1 of 1 3650501