
RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	2022/4/4		

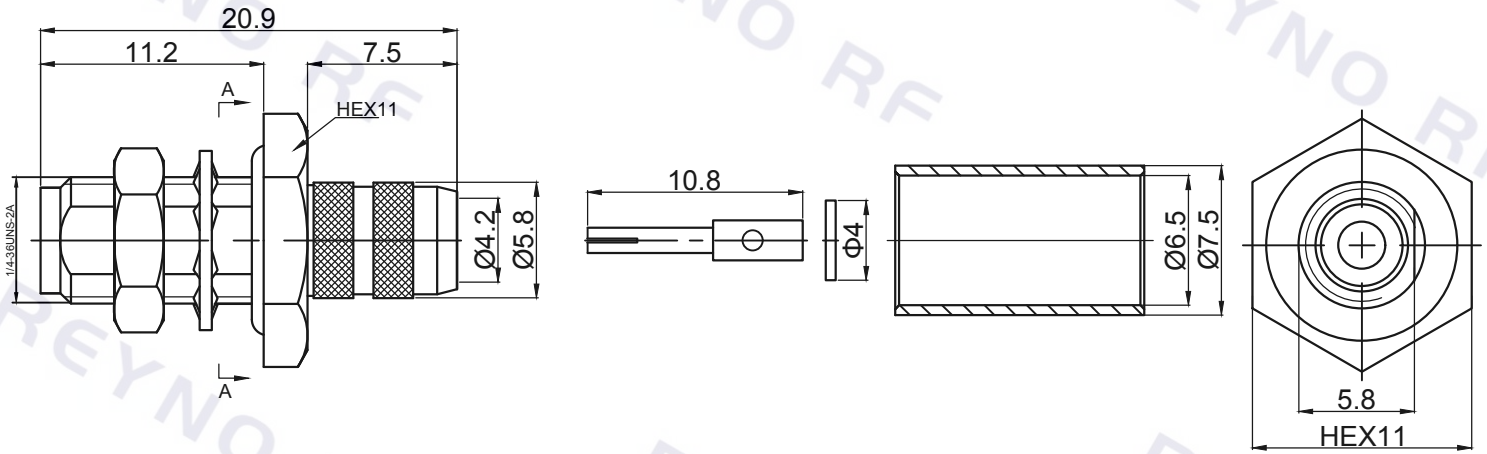

Material & Finishing
1. Center conductor : beryllium-copper, Gold Plating
2. Insulators : PTFE
3. Body: Brass, Ternary alloy Plating
4. Other: Brass, Nickel Plating
5. Gasket: Silicone Rubber

Electrical Data
1. Characteristic Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: 1.15(DC-3GHz)
4. Dielectric Resistance: ≥5000MΩ

RoHS Compliant.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

Unit:mm

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 6.4 MAX.
ALL TOLERANCES ARE:

DECIMALS	CHAMFER	ANGLES
0~6± 0.08	0.5~3± 0.5	0~10± 1°
6~30± 0.1	3~6± 0.5	10~50± 30'
30~120± 0.2	6~30± 1	50~120± 20'

THESE DRAWING & SPEC. ARE THE PROPERTY OF LEILUO RF AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

雷珞电子 REYNO RF

Title: SMA Female Crimp for LMR240 cable

Drawn by	Ckd by	Appd by	Date
			2022/4/4

Scale	Sheet
5:1	Sheet 1 of 1