


RevNo	Revision note	Date	Signature	Checked
00	Sketch Only			

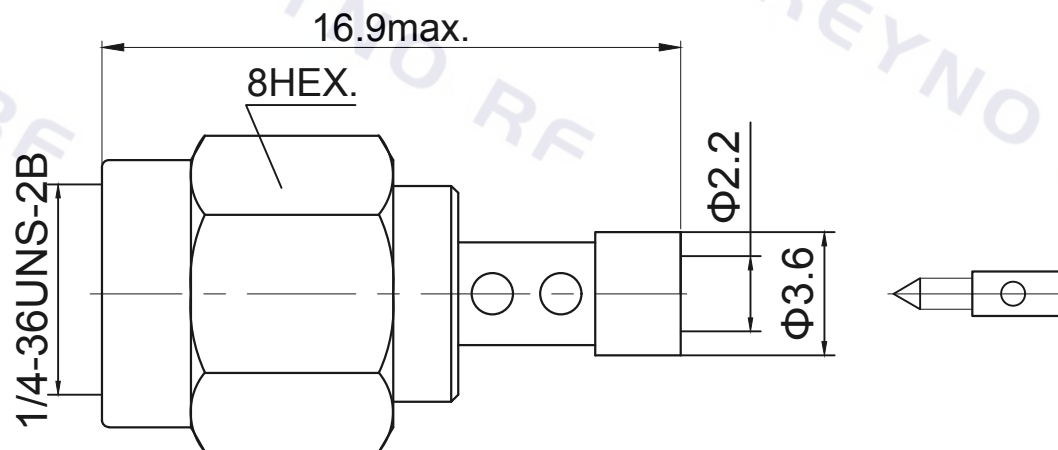

Material & Finishing:

1. Center conductor: Brass, Gold Plating
2. Insulator: PTFE
3. Body : Brass, Gold Plating
4. Other Metal Parts:Nut:Brass,Gold Plating
5. Gasket: Silicone Rubber

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: $\leq 1.15(0\sim 3\text{GHz})$

RoHS Compliant.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

Unit:mm



Title

SMA Male Solder for RG316 Cable

Drawn by

Ckd by

Appd by

Date

Scale
5:1

Sheet 1 of 1

J3A

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64/ MAX.			
ALL TOLERANCES ARE:			
DECIMALS	FRACTIONS	ANGLES	
x $\pm$ 1.0	$\pm 1/64$	x' $\pm$ 1'	
x.x $\pm$ 0.5		x"x' $\pm$ 0.5	
	x.xx $\pm$ 0.1		

THESE DRAWING & SPEC. ARE THE PROPERTY OF LEILUO RF AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.